# CL 6048 with Pump Installed in Building

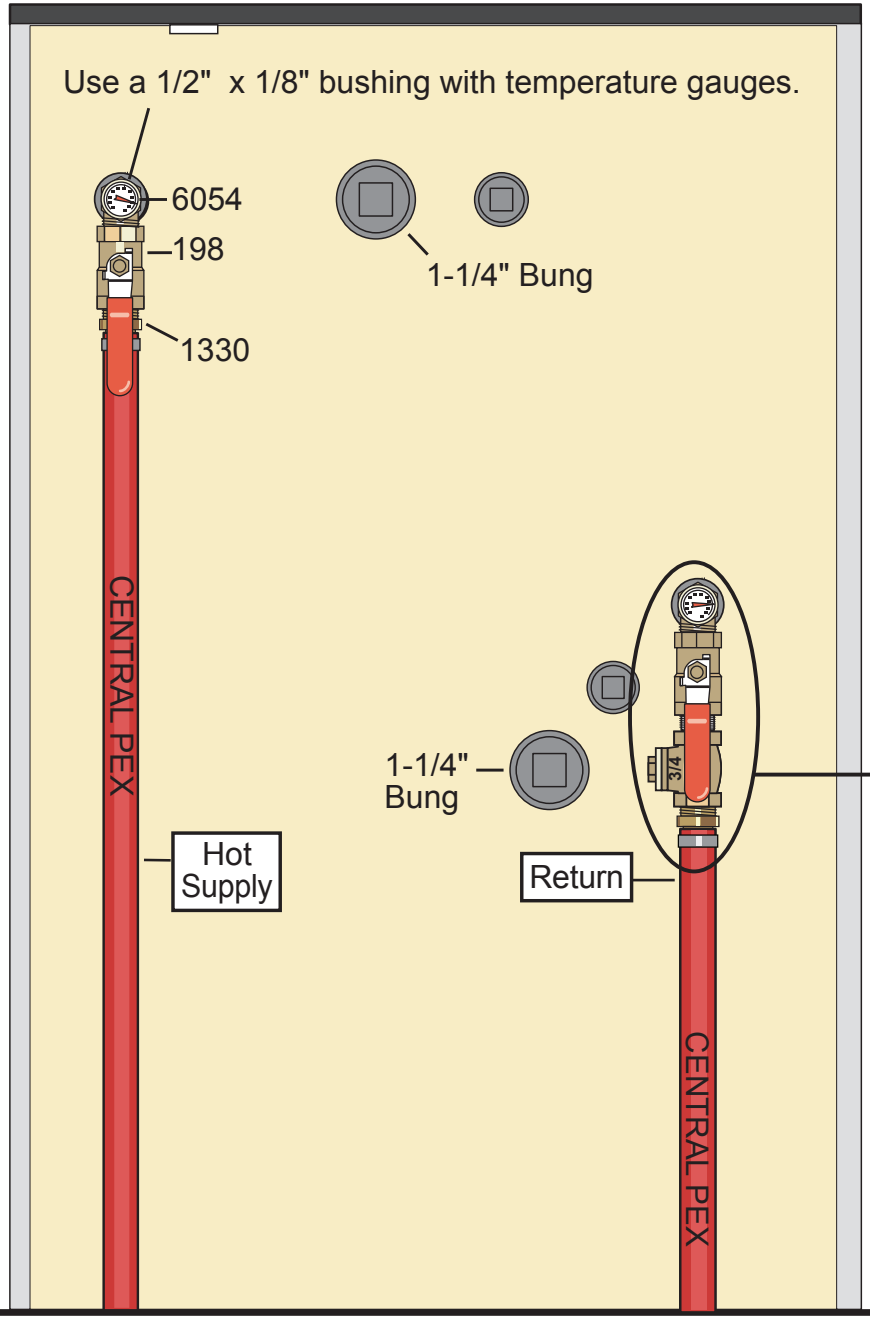


## Parts List*

| Qty | p/n | Description |
|---|---|---|
| 1 | 118 | 3/4" Close Nipple |
| 2 | 198 | 3/4" Ball Valve |
| 1 | 296 | 3/4" Swing Check Valve |
| 2 | 1330 | 3/4" x 1" MPT to PEX |
| 2 | 3042 | 1/2" x 1/8" Bushing |
| 2 | 6054 | Temperature Gauge |
| 1 | 6593 | Grounding Rod Kit |

*Parts and accessories sold separately.

## Return Side View

For illustration purposes only.

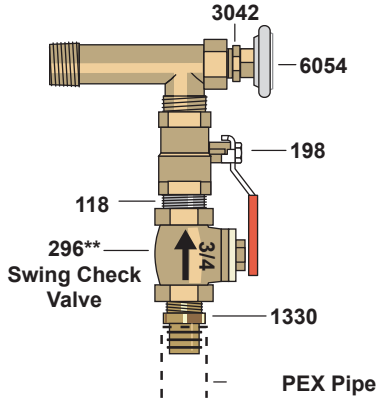


**For 1-1/4" lines use p/n 5871.
Central Boiler recommends installing swing check valves on the return lines to eliminate reverse flow.

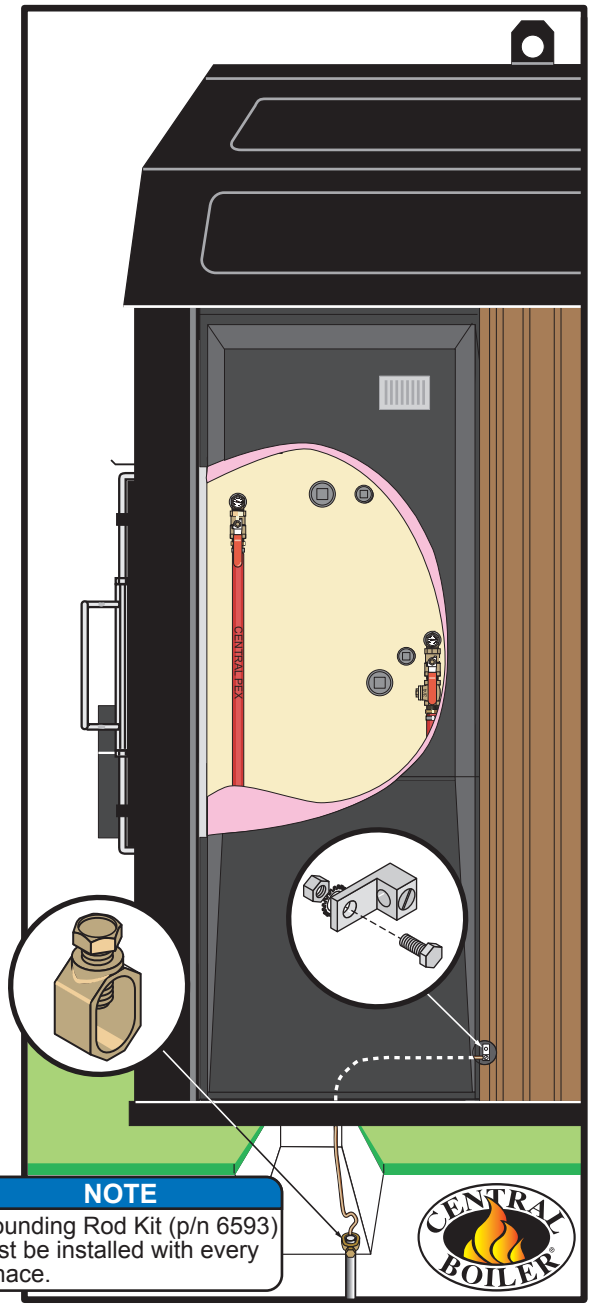


**NOTE**
Grounding Rod Kit (p/n 6593) must be installed with every furnace.